


REF: 25-12, 25-11, 25-10, 25-9, 25-8, 25-7, 25-6, 25-5, 25-4, 25-3, 25-2, 25-1

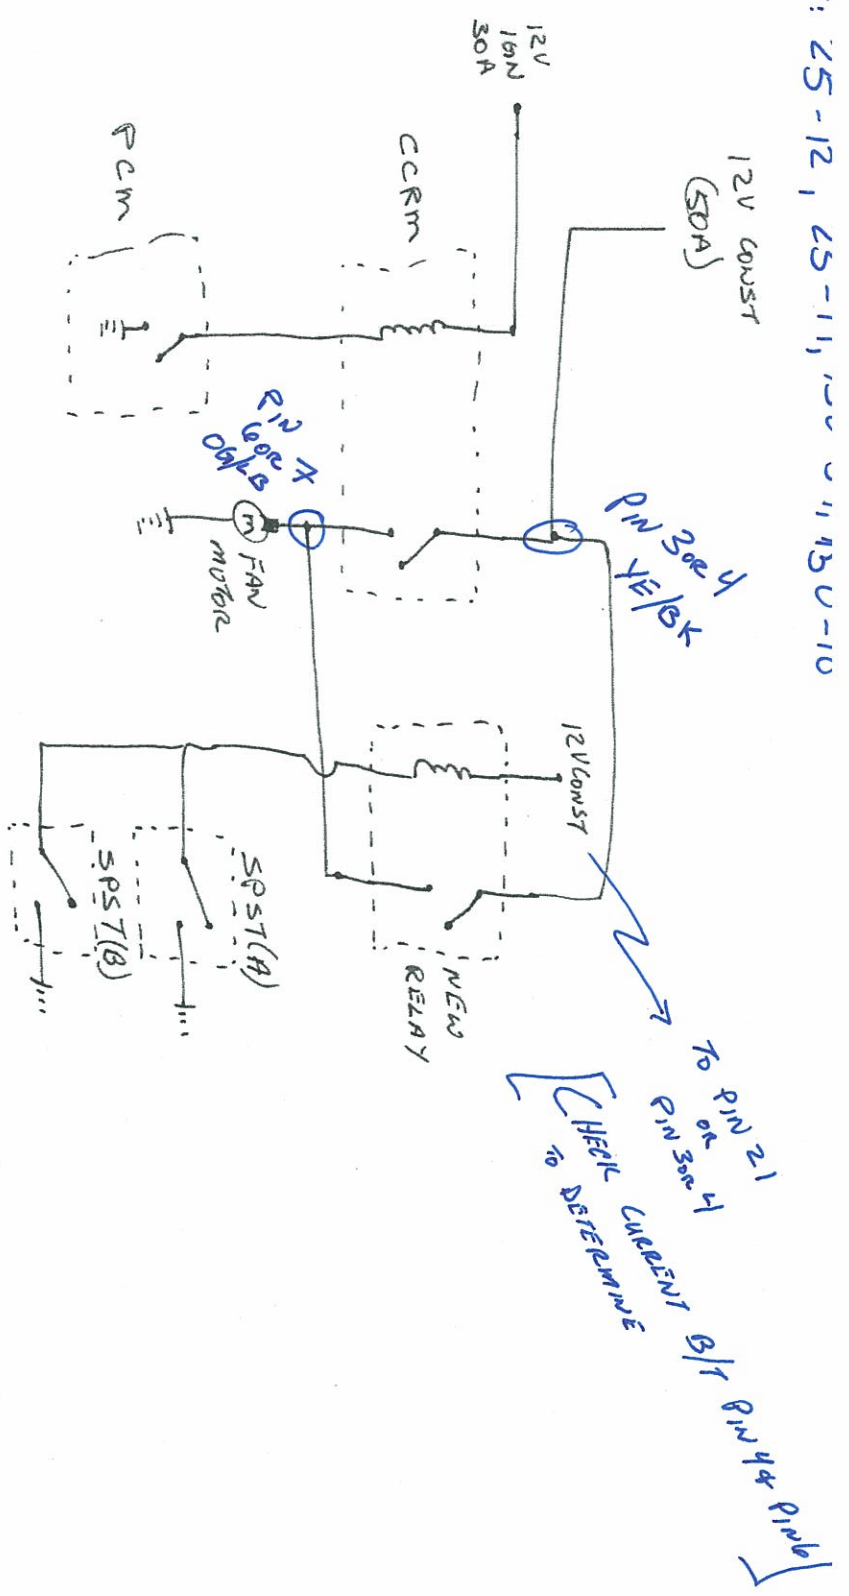


SPST (A) : MOUNTED INSIDE CAR TO RUN FAN (HIGH) AT ALL TIMES


SPST (B) : MOUNTED UNDER THE HOOD TO RUN FAN (HIGH) AT ALL TIMES

25-11 Engine Controls

Cobra

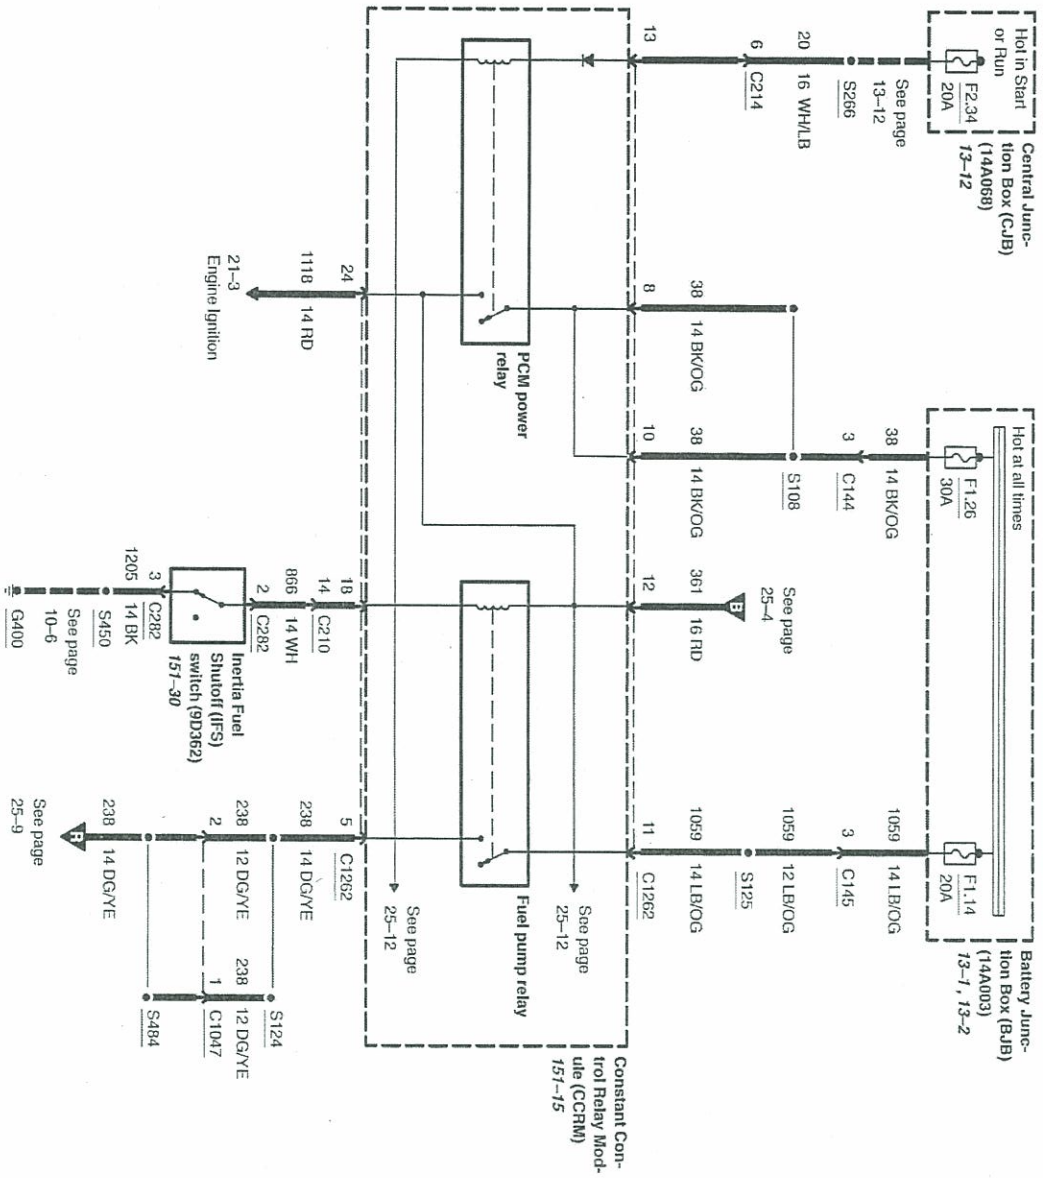


Cobra

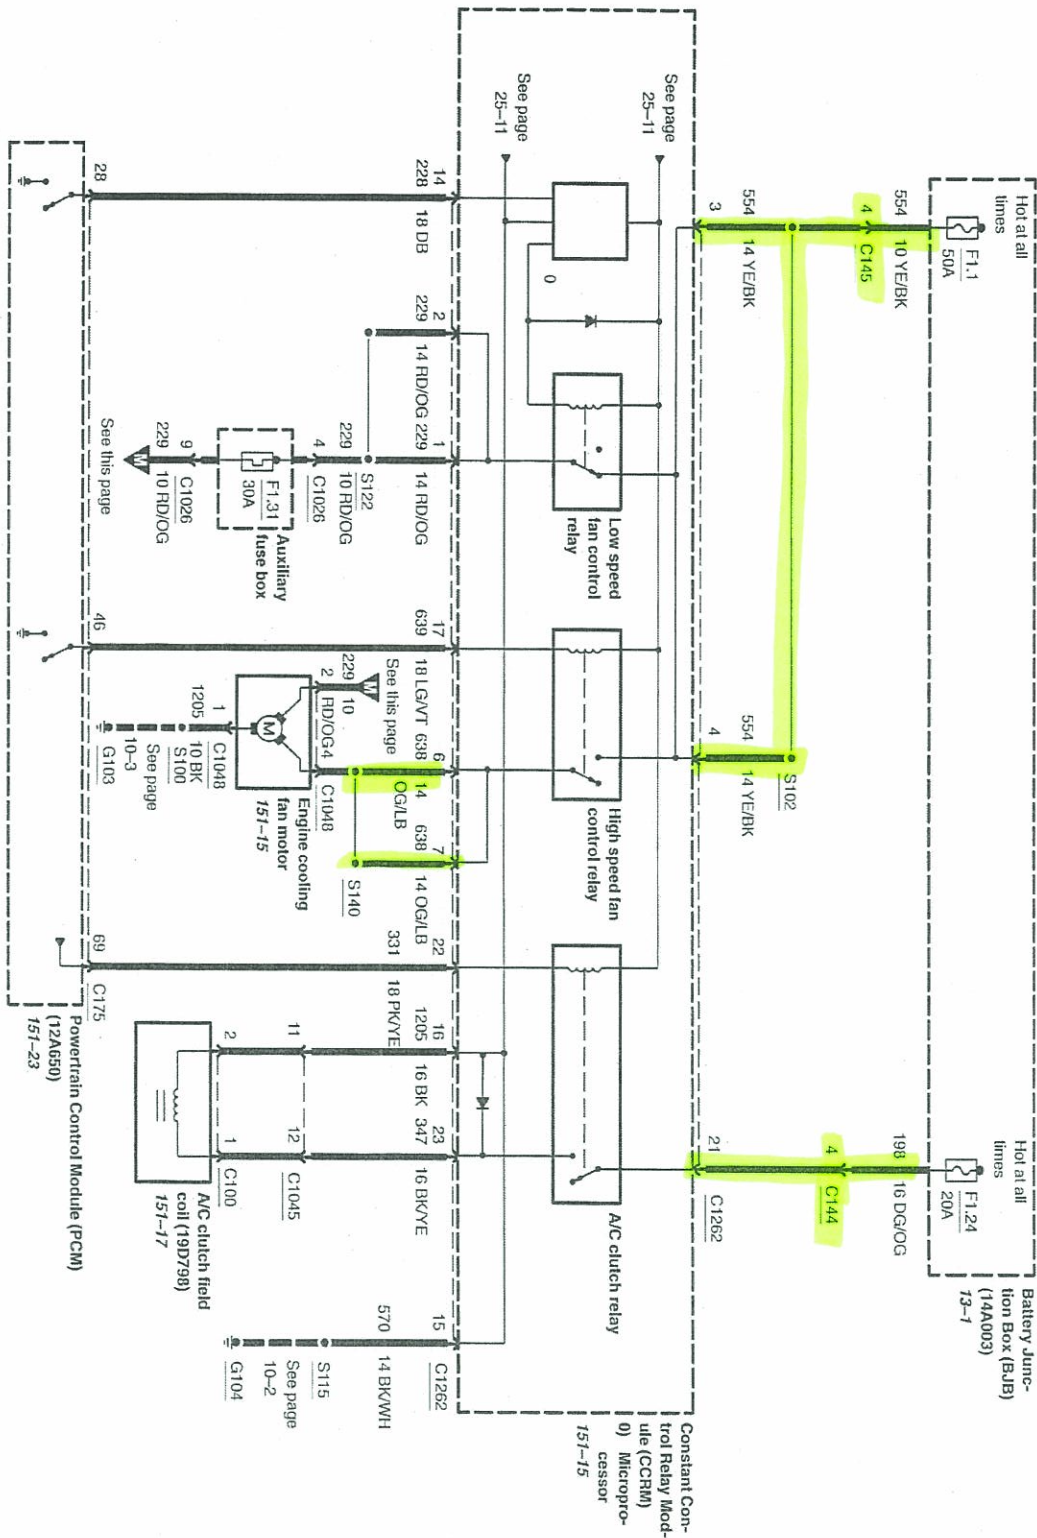

C1261

14290

Low pitch horn



Pin	Circuit	Circuit function
1	1 (DB)	Horn relay, switched power, output

C1262


12A581

Constant Control Relay Module (CCRM)




Pin	Circuit	Circuit function
1	229 (RD/OG)	Low speed fan control relay, switched power
2	229 (RD/OG)	Low speed fan control relay, switched power
3	554 (YE/BK)	Voltage supplied at all times (overload protected)
4	554 (YE/BK)	Voltage supplied at all times (overload protected)
5	238 (DG/YE)	Fuel pump relay, switched power, output
6	638 (OG/LB)	High speed fan control relay, output
7	638 (OG/LB)	High speed fan control relay, output
8	38 (BK/OG)	Voltage supplied at all times (overload protected) 30A
9	-	not used
10	38 (BK/OG)	Voltage supplied at all times (overload protected) 30A
11	1059 (LB/OG)	Voltage supplied at all times (overload protected) 20A
12	361 (RD)	Voltage supplied in Start and Run (overload protected)
13	20 (WH/LB)	Voltage supplied in Start and Run (overload protected)
14	228 (DB)	Low speed fan control relay, control
15	570 (BK/WH)	Ground
16	1205 (BK)	Ground
17	639 (LG/NT)	High speed fan control relay, control
18	1205 (BK)	Ground
	866 (WH)	Inertia Fuel Shutoff (IFS) switch (9D362), Ground, input
19	-	not used
20	-	not used
21	198 (DG/OG)	Voltage supplied at all times (overload protected) 20A
22	331 (PK/YE)	A/C clutch relay, control
23	347 (BK/YE)	A/C clutch relay, switched output
24	1118 (RD)	PCM power relay, output

C142
7C078/
15525
 Heated Oxygen
 Sensor (HO2S)
 #12 (9G444)




Pin	Circuit	Circuit function
1	391 (RD/YE)	Voltage supplied in Start and Run (overload protected)
2	389 (WH/BK)	Heated Oxygen Sensor (HO2S) #12 (9G444), heater
3	359 (GY/RD)	signal, return
4	392 (RD/LG)	Heated Oxygen Sensor (HO2S) #12 (9G444), input

C144




- (1) 33 (WH/PK)
- (2) 494 (TN/LG)
- (3) 38 (BK/OG)
- (4) 198 (DG/OG)
- (5) 32 (RD/LB)
- (6) 914 (TN/OG)
- (7) 198 (DG/OG)
- (8) 511 (LG)
- (9) 492 (BN)
- (10) 239 (WH/OG)
- (11) 511 (LG)
- (12) -
- (13) 915 (PK/LB)
- (14) 1059 (LB/OG)
- (15) 514 (YE/RD)
- (16) 516 (YE/BK)




- (1) 33 (WH/PK)
- (2) 494 (TN/LG)
- (3) 38 (BK/OG)
- (4) 198 (DG/OG)
- (5) 32 (RD/LB)
- (6) 914 (TN/OG)
- (7) 198 (DG/OG)
- (8) 511 (LG)
- (9) 492 (BN)
- (10) 239 (WH/OG)
- (11) 511 (LG)
- (12) -
- (13) 915 (PK/LB)
- (14) 1059 (LB/OG)
- (15) 514 (YE/RD)
- (16) 516 (YE/BK)

C145




- (1) 570 (BK/WH)
- (2) 1205 (BK)
- (3) 1059 (LB/OG)
- (4) 554 (YE/BK)



- (1) 570 (BK/WH)
- (2) 1205 (BK)
- (3) 1059 (LB/OG)
- (4) 554 (YE/BK)

C146




- (1) 33 (WH/PK)



- (1) 262 (BN/PK)

C150

14290
 Wheel speed
 sensor, left
 front (2C205)



Pin	Circuit	Circuit function
1	521 (TN/OG)	Wheel speed sensor, left front (2C205) +
2	522 (TN/BK)	Wheel speed sensor, left front (2C205) -